

AFL2-15A-H61

Intel® Core™ i7/i5/i3 and Pentium® processor

AFL2-W15B-H61

Intel® Core™ i7/i5/i3 and Pentium® processor



AFL2-15A-H61

Features

- Flat-bezel LCD with LED backlight
- Intel® Core™ i5/ i3 and Pentium® processor
- Two 204-pin DDR3 SO-DIMM slot (system max. 16GB) preinstalled with 4GB (2GB x 2)
- Projected capacitive touchscreen and 5-wire resistive type touchscreen supported
- Wi-Fi 802.11b/g/n wireless
- EM or Mifare RFID reader
- Built-in 2M pixels webcam with AF, AE and AWB capabilities
- Built-in two 2W speakers and microphone
- IP 64 compliant front panel
- Auto dimming control
- Light fanless technology design
- Type K thermocouple temperature sensor
- Wide range 9~36 VDC input



Specifications

	Model	AFL2-15A-H61	AFL2-W15B-H61	
LCD Specifications	Size	15" (4:3)	W15.6" (16:9)	
	Resolution	1024 (W) x 768 (H)	1366 (W) x 768 (H)	
	Brightness (cd/m ²)	400	300	
	Contrast Ratio	700:1	500:1	
	LCD Color	262K/16.2M	16.7M	
	Pixel Pitch (mm)	0.297 (H) x 0.297 (V)	0.252 (H) x 0.252 (V)	
	Viewing Angle (H-V)	160° / 140°	170° / 160°	
	Backlight MTBF	50,000 hrs (LED backlight)	50,000 hrs (LED backlight)	
Touch	Touch Screen	5-wire resistive type with RS-232 interface / projected capacitive type with USB interface		
	Touch Controller	PenMount DMC9000 / EETI EXC7200 & EXC5404		
System	CPU	2nd/3rd Generation Intel® Core™ i7/i5/i3 and Pentium® processors		
	Chipset	Intel® H61		
	RAM	Support two 204-pin DDR3 SO-DIMM slot (max. 16GB) preinstalled with 4GB (2GB x 2)		
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0		
	Audio Codec	Realtek ALC892 HD Audio codec		
	Storage	CF Type II socket 2.5" SATA 3Gb/s HDD bay		
	Input / Output		2 x RS-232 (DB-9 connector) 1 x GbE LAN (RJ-45 connector) on left side 1 x RS-422/485 (RJ-45 connector) 3 x USB 2.0 (two on the bottom, one on the left) 2 x USB 3.0 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel 1 x Line out, MIC on left side	1 x VGA port 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack 1 x Type K connector
	Other Features	Audio	AMP 2W + 2W (internal speaker)	
		Camera	2M pixels with low light function	
RFID Reader		EM 125 KHz or Mifare 13.56 MHz card reader (optional)		
MSR Card Reader		MSR card reader (optional)		
TPM		Reserved by pin-header		
OSD Function		LCD on/off, brightness up/down, volume up/down, Hot Key		
Ambient Light Sensor		Yes		
Infrared Remote Controller		Yes		
System Cooling	Light fanless (smart fan operates above default temperature setting)			
Connectivity	Wireless	IEEE 802.11b/g/n		
Physical	Construction Front Panel	PC + ABS Plastic		
	Mounting	Wall, Stand, Arm VESA 100mm x 100mm	Panel, Wall, Rack, Stand, Arm VESA 100mm x 100mm	
	Color	Black		
	Dimensions (WxHxD) (mm)	363.2 x 305.1 x 58.8	399.4 x 271.2 x 58.8	
	Weight (N/G)	5.2 kg / 7.3 kg	4.5 kg / 6.5 Kg	
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C		
	Storage Temperature (°C)	-20°C ~ 60°C		
	Humidity	10% to 95% (non-condensing)		
	IP Level	IP 64 compliant front panel		
	Safety&EMC	CE / FCC		
Power	Power Supply	90W power adapter Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC		
	Power Requirement	9 ~ 36 VDC		
	Power Consumption	19V@3.42A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz DDR3 memory)	19V@3.95A (Intel® Core™ i3-2120 CPU with 4GB 1333 Mhz DDR3 memory)	

Ordering Information

● AFL2-15A-H61

Part No.	Description
Core i5	AFL2-15A-H61-i5/R-R13 15" 400cd/m ² XGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-15A-H61-i5/PC-R13 15" 400cd/m ² XGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13
Core i3	AFL2-15A-H61-i3/R-R13 15" 400cd/m ² XGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-15A-H61-i3/PC-R13 15" 400cd/m ² XGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13
Pentium	AFL2-15A-H61-P/R-R13 15" 400cd/m ² XGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-15A-H61-P/PC-R13 15" 400cd/m ² XGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13

● AFL2-W15B-H61

Part No.	Description
Core i5	AFL2-W15B-H61-i5/R-R13 15.6" 300cd/m ² HD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-W15B-H61-i5/PC-R13 15.6" 300cd/m ² HD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13
Core i3	AFL2-W15B-H61-i3/R-R13 15.6" 300cd/m ² HD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-W15B-H61-i3/PC-R13 15.6" 300cd/m ² HD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13
Pentium	AFL2-W15B-H61-P/R-R13 15.6" 300cd/m ² HD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R13
	AFL2-W15B-H61-P/PC-R13 15.6" 300cd/m ² HD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 4GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R13

Options



Item	AFL2-15A-H61	AFL2-W15B-H61
Panel Mounting Kit	N/A	AFL2PK-W15B
Wall Mounting Kit	AFLWK-19B	
Rack Mounting Kit	N/A	AFL2RK-W15B
Arm	ARM-11-RS/ARM-31-RS	
Stand	STAND-A21-R10/ STAND-C19-R10/ STAND-210-R11	
Magnetic Stripe Reader	AFL2P-15AMSR-U-R10	AFL2P-W15BMSR-U-R10
Trusted Platform Module (TPM)	TPM-IN01-R11	
EM RFID Reader	AFL2-EM-RFID-KIT01-R10	
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11	
OS: Win XPE (2GB CF Card)	AFL2CF-15A-H61-XPE-2G-R13	
OS: Win XPE (4GB CF Card)	AFL2CF-15A-H61-XPE-4G-R13	
OS: Win 7 Embedded (4GB CF Card)	AFL2CF-15A-H61-WES7P-4G-R13 (for Projected Capacitive Touch) AFL2CF-15A-H61-WES7E-4G-R13 (for Resistive Touch)	

Packing List


Item	P/N	Q'ty	Description
Utility CD	7B000-000957-RS	1	drivers and user manual
One Key Recovery CD	7B000-000781-RS	1	
Power Adapter	63040-010090-101-RS	1	FSP090-D2BA1; 90~264VAC input; 90W; 19VDC output
Power Cord	32702-000401-100-RS	1	European, 1500mm
Power Transfer Cord	32702-000300-100-RS	1	
RJ-45 to DB-9 COM Port Cable	32005-000200-200-RS	1	
IR Remote Controller	7Z000-SLPCB005-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3 x 4 for securing HDD
M4 Screw Pack	44033-040061-RS	4	M4 x 4 for VESA screw
Temperature Sensor Cable	32133-004300-100-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

Function Keys

- Fn
- Backlight On/Off
- Audio -
- Audio +
- Brightness -
- Brightness +
- Fn + RFID enable / disable
- Fn + Audio mute
- Fn + Camera enable / disable
- Fn + Front side Mini USB & MicroSD enable / disable
- Fn + Power on / off

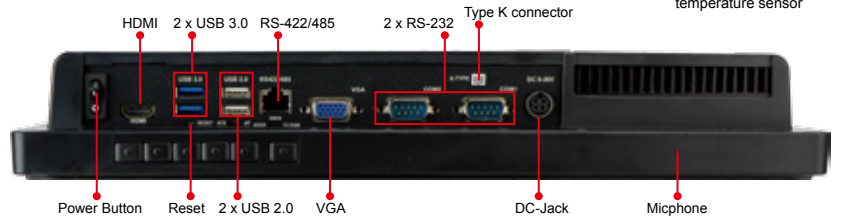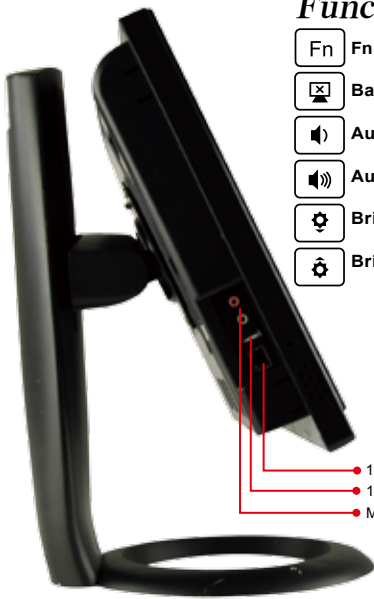

AFL2-15A-H61
Dimensions
(Unit: mm)

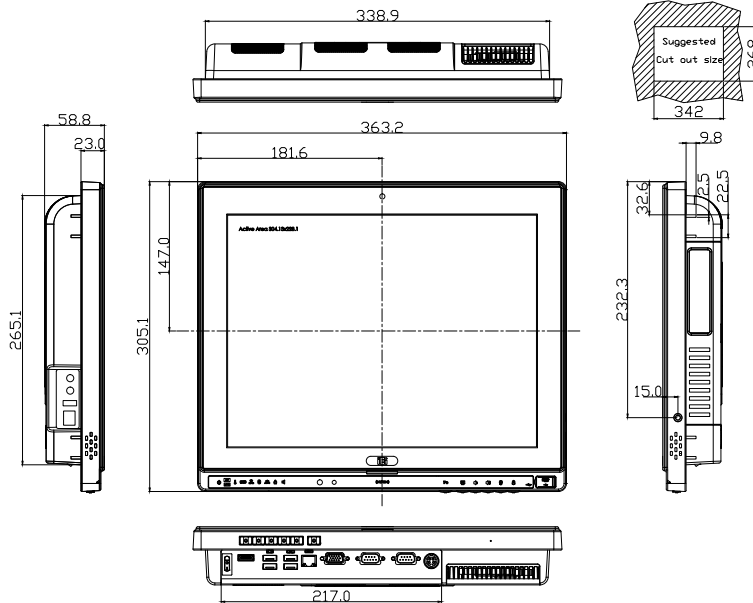

AFL2-W15B-H61
Dimensions
(Unit: mm)

