


# IOVU-751R

7" TFT WVGA LCD with resistive touchscreen




## Features

- 7" TFT WVGA LCD with resistive touchscreen
- Alchemy™ AU1250 500 MHz CPU
- Powered by Windows® CE 5.0
- Built-in Ethernet LAN
- Built-in RS-232/422/485 Port
- Supports Power over Ethernet (PoE)
- Multimedia support for MPEG 1/2/4 and WMV9

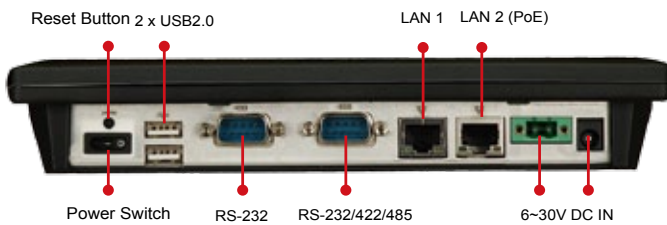

## IOVU-751R Dimensions (Unit: mm)

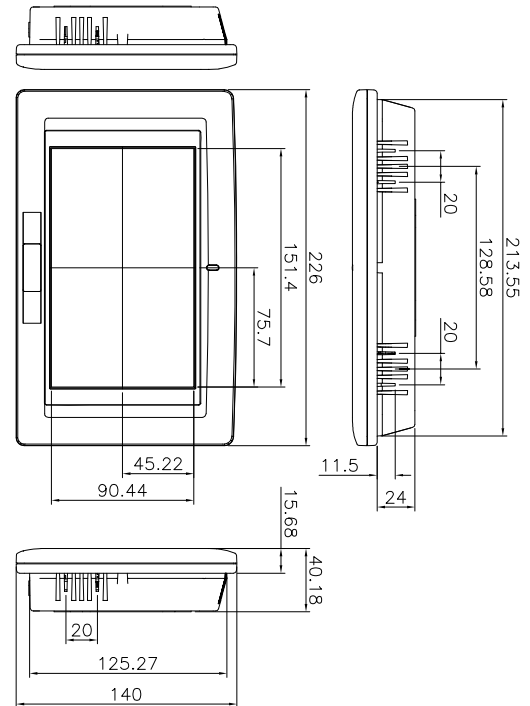

## Packing List

- 1 x IOVU-751R
- 1 x Utility CD includes application tools, SDK, and technical document
- 1 x Null modem cable
- 1 x Touch pen
- 1 x Screw kit

## Ordering Information

| Part No.           | Description  |
|--------------------|--|
| IOVU-751R-CE5/-R10 | 7", WVGA fan-less touch panel PC with RMI Alchemy AU1250 CPU, 256MB DDR2 SDRAM, LAN supports PoE function and built-in Windows® CE5.0 Operating System |

## Options

| Part No.                   | Description  |
|----------------------------|--|
| AFLPK-12                   | Panel mount kit  |
| AFLWK-12                   | VESA 75 wall mount kit   |
| ARM-11-RS                  | LCD Monitor/PPC Arm kit loading capacity from 3kg~7kg  |
| STAND-A08-RS               | LCD Monitor/PPC Stand kit for VESA 75 and supports up to 5 kg  |
| VSTAND-A07                 | LCD Monitor/PPC Stand V type for VESA 75, 0~90 degree adjustable hinge and support up to 2.5 kg  |
| AFLP-12BMSR-U              | USB Magnetic Card Reader   |
| AFLP-BRW01-U / AFLPBRB01-U | USB Barcode Reader (White / Black)   |
| AFLP-CDB01 / AFLP-CDW01    | VFD Customer Display (Green) 5 x 7 dot matrix (Black / White)  |
| 63000-FSP060DBAB1553-RS    | Adapter Power; FSP;FSP060-DBAB1; Active PFC; Vin:90~264VAC; 60W; Dim: 62*110*31.5mm; Plug=9.5mm; Cable=1500mm; Erp(NO LOAD 0.5W); Vout:12VDC; Φ2.5/Φ5.5; CCL; RoHS |
| 63040-010060-060-RS        | 12V/5A DC 60W power adapter with bare wire, 90~264V AC input.  |