

SBOX-100-QM87

Maritime Embedded System

New

Features


- Fanless marine computer with 4th Generation Intel® Core™ i5 dual-core processor
- -15°C ~ +55°C wide temperature
- Isolation protection
 - » 4 x RS-232/422/485 isolated serial ports
 - » Isolated 18 V~24 V DC input
 - » 2 x Isolated CAN-bus 2.0B
- 2 x 2.5" SSD bay with RAID 0/1 function
- Supports IEI iRIS-2400 (IPMI 2.0 compliant)



Intel® Core™ i5 High Performance Computing Power in a Fanless Design

IEI's high performance marine solutions are built with the powerful Intel® Core™ i5 CPU within a fanless system architecture. No matter your applications are general marine system management, monitoring or conning systems, radar systems, or ECDIS navigation, IEI's marine computers will give you the most stability than ever.

- Improved CPU performance with Intel® 22nm 4th Generation Mobile Core™ i5-4400E 2.7 GHz processor
- Two 204-pin 1600/1333MHz dual-channel DDR3 SDRAM support up to 16 GB

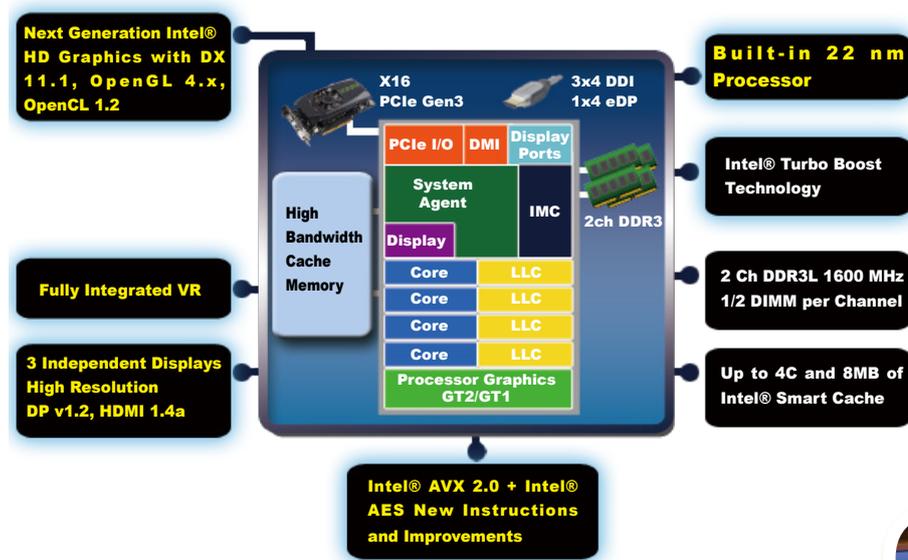


With IEI's fanless solutions, your vessels can avoid the bothersome of replacement of fan, increasing safety and efficiency for the crew and the entire ship.

Three independent aluminum heat sinks help the heat dissipate averagely, and help the system efficiently achieve wide operating temperature range between -15°C~55°C.

3 independent displays: HDMI, DVI, and VGA

The three simultaneously independent displays are supported via the on-board video output combinations of VGA, DVI and HDMI. This versatile combination of display output options make the marine system ideal for multi-monitor required applications in the bridge room.

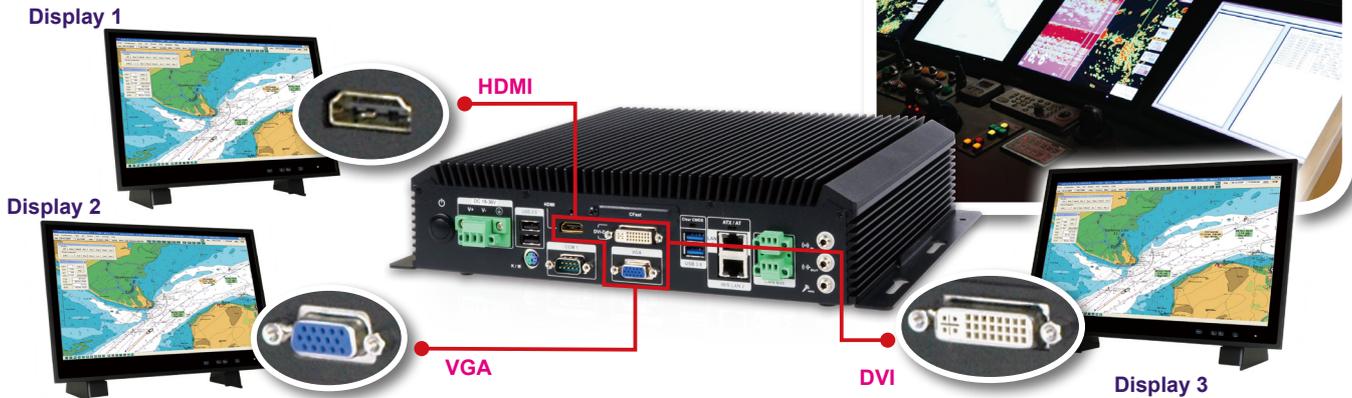

Multiple Isolated Ports for Comprehensive Protection against Electrical Surges

Ground loop and electric surges are common in the marine applications of electronic products due to the dense placement of devices. These stray electrical signals can cause equipment damage or malfunction.

■ 2.5 kV isolation protection on the RS-232/422/485

IEI marine computer is protected from any stray electrical signals from other devices on the ship. Electric surges that were generated from other electronic devices which often passed through serial lines to the marine computer can cause severe damage and malfunction to the computers.



■ Isolated 18 V~24 V DC power 2250 V DC Input to Output Basic Insulation

■ Two independent CAN 2.0B channels with 2.5 kV isolation protection

CAN 2.0B is a kind of marine electronic data network for communication between marine electronic devices such as chart plotters, navigation instruments, GPS receivers, etc.



IEI Remote Intelligent Management System

The marine computer supports IEI iRIS remote management solution which helps users to manage multiple devices through single management interface and elevates work efficiency. The iRIS solution only requires a module and Internet connection!




| iRIS Key Feature | Detailed Functions | iRIS Key Feature | Detailed Functions |
|----------------------------------|--|---------------------------------|--|
| System health monitor | <ul style="list-style-type: none"> • Hardware monitor • Health log • Event log | Screen record | <ul style="list-style-type: none"> • Remote video streaming record • Event Trigger Setting & video record |
| Remote system maintenance | <ul style="list-style-type: none"> • Remote BIOS update • Remote OS recovery • Remote KVM + One Key Recovery • Remote out-of-band backup | Remote power control | <ul style="list-style-type: none"> • Reset Power • Power Off Server – Immediately • Power Off Server – Orderly • Power On Server • Power Cycle Server |
| Active alert & notice | <ul style="list-style-type: none"> • Send instant system alerts via e-mail • Send instant system alerts via SMS • Send instant system alerts to management server | Remote troubleshooting | <ul style="list-style-type: none"> • Remote software update • Remote OS installation & recovery • Remote KVM • Post code display |
| Remote device control | <ul style="list-style-type: none"> • Fan control • Remote KVM • Remote setting BIOS | Diagnose before dispatch | <ul style="list-style-type: none"> • Health log analysis • Event log analysis |
| | | Group control | <ul style="list-style-type: none"> • Group control |


- 1 IEIMobile Solutions
- 2 Automation Panel PC Solutions
- 3 Healthcare Panel PC Solution
- 4 Industrial System
- 5 O'Ring Network Communication
- 6 Automation Control
- 7 Optional Peripherals

Fully Integrated I/O

Front view

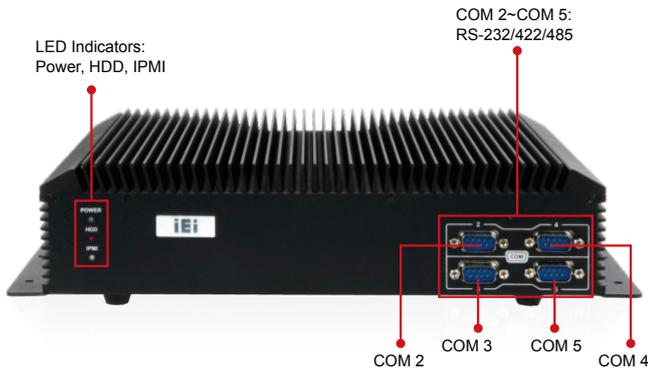


Rear view

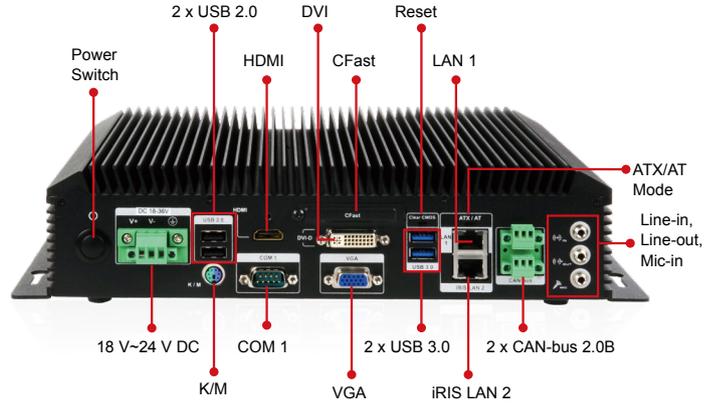

Specifications

| Model Name | SBOX-100-QM87 | | |
|----------------|-------------------------|---|--|
| Chassis | Color | Black | |
| | Dimensions (WxHxD) (mm) | 290 x 75 x 225 | |
| | System Fan | Fanless | |
| | Chassis Construction | Extruded aluminum alloy | |
| Motherboard | CPU | Intel® mobile Core™ i5-4400E (2.7 GHz, 37W) | |
| | Chipset | Intel® QM87 | |
| | System Memory | 2 x 204-pin DDR3 SO-DIMM slot (system max. 16 GB) Pre-installed 4 GB DDR3 SO-DIMM | |
| IPMI | iRIS Solution | iRIS-2400 | |
| Storage | Hard Drive | 2 x 2.5" SATA 6Gb/s SSD bay with RAID 0/1 function | |
| | CF Card/CFast | 1 x CFast | |
| | PS2 (KB/MS) | 1 | |
| | USB 3.0 | 2 | |
| I/O Interfaces | USB 2.0 | 2 | |
| | Ethernet | 2 x RJ-45 with teaming support 1 x PCIe GbE by Intel® I217LM 1 x PCIe GbE by Intel® I210-AT (2 with 2 kV isolation) | |
| | COM Port | 1 x DB-9 (non-isolated) 4 x RS-232/422/485 (with 2.5 kV isolation) | |
| | CAN-bus/OBD-II | 2 x CAN-bus (with 2.5 kV isolation) | |
| | Display | 1 x VGA, 1 x DVI-D, 1 x HDMI | |
| | Resolution | VGA: Up to 1920 x 1200 @ 60 Hz HDMI: Up to 2500 x 1600 @ 60 Hz DVI-D: Up to 2500 x 1600 @ 60 Hz | |
| | Audio | 1 x Line-out, 1 x Line-in, 1 x Mic-in | |
| | Wireless | 2 x Antenna SMA hole (reserved) | |
| | Expansions | PCIe Mini | 2 x Full size |
| | LED Indicator & Button | Indicator | Power (power on: green, power off: orange), storage (red, blinking), IPMI (blue) |
| Power Input | | Terminal block: Isolated 24V DC (18~31.2 V DC) | |
| Power | Consumption | 100 W (Intel® mobile Core™ i5-4400E with 4 GB DDR3 memory) | |
| | Mounting | Wall mount | |
| Reliability | Operating Temperature | -15°C ~ 55°C (5°F ~ 131°F) with air flow (SSD) | |
| | Storage Temperature | -20°C ~ 60°C (-4°F ~ 140°F) | |
| | Humidity | 5% ~ 95%, non-condensing | |
| | Operating Shock | | |
| | Operating Vibration | IEC 60945 and DNV 2.4 IASC-E10 compliant | |
| | Weight (Net/Gross) | 4.08 kg / 6.03 kg | |
| | Safety/EMC | EMC/CE/FCC/DNV, IEC 60945 4th, IACS-E10, IEC 61174 compliant IP rating: IP22 compliant rear cover | |
| OS | Supported OS | Microsoft® Windows® Embedded 8, Microsoft® Windows® Embedded Standard 7 E | |

Dimensions (Unit: mm)

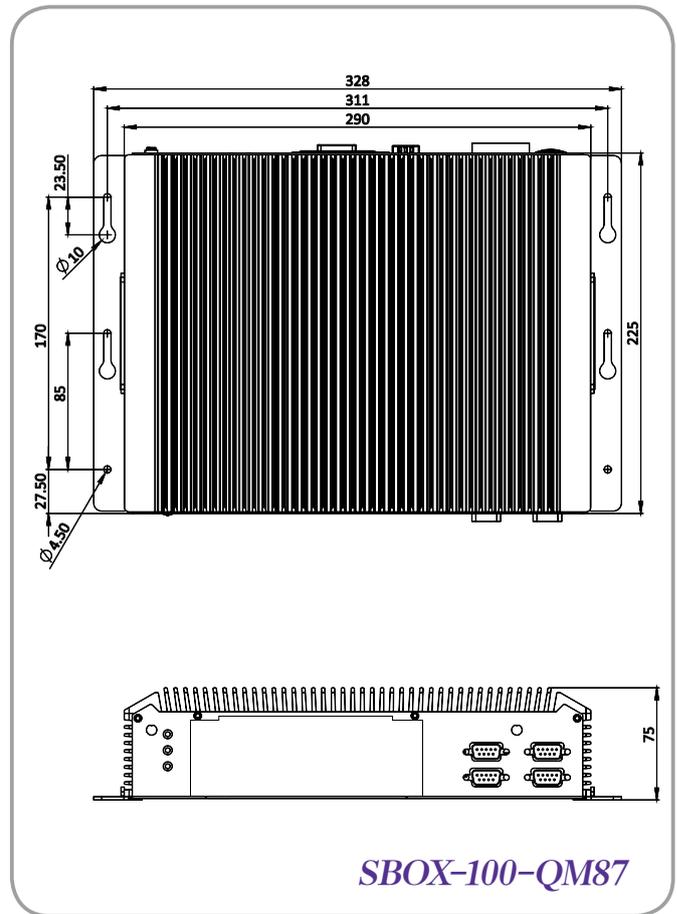

Ordering Information

| Part No. | Description |
|---------------------------------|--|
| SBOX-100-QM87I-5I/4G-R10 | Fanless marine computer with Intel® Mobile Core™ i5-4400E 2.7 GHz processor, 4 GB DDR3 memory, iRIS-2400 supported, isolated 18 V~36 V DC, R10 |

Packing List

| Item | P/N | Qty | Description |
|-------------------------|---------------------|-----|-------------------------|
| User manual & driver CD | | 1 | Drivers and user manual |
| PS/2 cable | 32006-000300-100-RS | 1 | PS/2 cable |
| Rubber pad & screw pack | | 1 | Rubber pad & screw pack |