


# DSP500-523 NEW

Digital Signage Player with 8th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, 3 HDMI 2.0, 4 USB and GbE LAN


## Features

- 8th gen Intel® Core™ i7/i5/i3 & Pentium® processor (Coffee Lake)
- 2 DDR4-2400 SO-DIMM for up to 32GB of memory
- 3 HDMI 2.0
- 4 USB 3.1 and 1 GbE LAN
- 1 M.2 Key E 2230 for Wi-Fi/BT
- 1 M.2 Key B 3042 for 4G LTE
- 1 M.2 Key M 2280 for storage

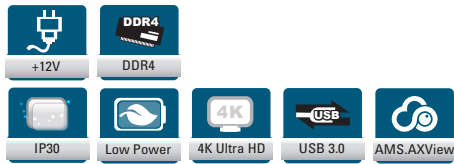

## Specifications

CPU	Intel® Core™ i7-8700T Hexa Core processor 2.4GHz 12MB Cache, TDP 35W Intel® Core™ i5-8500T Hexa Core processor 2.4GHz 12MB Cache, TDP 35W Intel® Core™ i3-8100T Hexa Core processor 2.1GHz 9MB Cache, TDP 35W Intel® Pentium® G5400T dual Core processor 3.1GHz 4MB Cache, TDP 35W
System Memory	2 x DDR4-2666 SO-DIMM, up to 32GB
Chipset	Intel® Q370
Storage	1x M.2 Key M 2280 (SATA & NVMe)
TPM	TPM 2.0
Watchdog Timer	255 levels, 1 to 255 sec./min.
System I/O Outlet	1 x 10/100/1000 Mbps Ethernet 4 x USB 3.1 3 x HDMI 2.0 or 2 x HDMI 2.0 1 x Line-out 1 x RS-232 1 x Device management 1 x Remote switch 1 x Screw type VDC power input 1 x VDC power input connector 4 x Antenna opening
Expansion Interface	1 x M.2 Key E 2230 for Wi-Fi/BT (optional) 1 x M.2 Key B 3042 for 4G/LTE (optional) 1 x SIM card slot
Battery Lithium	Lithium 3 V/220 mAh
Power Input	+12V DC-in
Dimensions	202 mm (7.95") (W) x 196 mm (7.71") (D) x 39 mm (1.53") (H)
Weight (net/gross)	1.8kg (3.96 lb)/2.8kg (6.17 lb)
Vibration Endurance	3 Grms with M.2 storage (5 - 500Hz, X, Y, Z directions)
Operating Temperature	0°C to +45°C (+32°F to +113°F)
Humidity	10% - 90% relative humidity, non-condensing
Certifications	CE, FCC class A
EOS Support	Win 10 IoT, Linux
Software Support	AMS.AXView

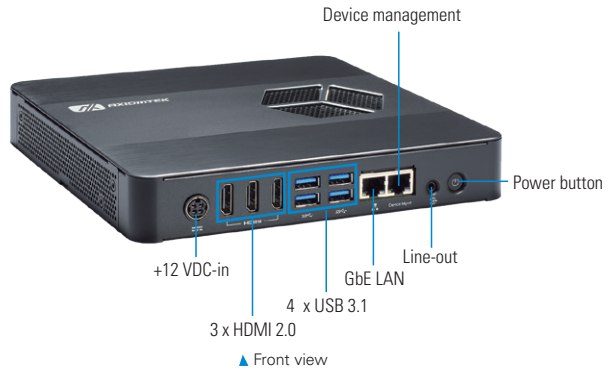

## Packing List

- 1 x Quick installation guide
- 4 x Foot pad

## Ordering Information

Standard	
DSP500-523-US	Digital signage player with Intel® 8th gen Intel® Core™ i7/i5/i3 & Pentium® processor 3 HDMI, 4 USB 3.1, GbE LAN
DSP500-523-EU	Digital signage player with Intel® 8th gen Intel® Core™ i7/i5/i3 & Pentium® processor 3 HDMI, 4 USB 3.1, GbE LAN

## Optional

Wall mount kit	
Adapter 12V 84W	
DDR4 SO-DIMM	8GB - 32GB
Wireless LAN Kit	Wi-Fi module and antenna
Storage	M.2 Key M 2280 (SATA & NVMe)

## Dimensions

